785GM-S3

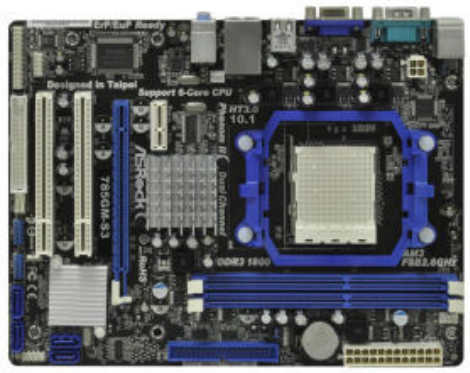

- Phenom II X6 6-Core CPU Ready
- Supports ASRock UCC - Unlock CPU Core
- Supports Dual Channel DDR3 1800(OC)
- Integrated AMD Radeon HD 4200 graphics, DX10.1 class iGPU, Shader Model 4.1
- Supports ASRock Instant Boot, Instant Flash, OC Tuner, IES, OC DNA, AIWI, APP Charger
- ErP/EuP Ready

  - Free Software : CyberLink DVD Suite - OEM and Trial; Creative Sound Blaster X-Fi MB - Trial

-

Produkt Spezifikationen

Generelles	
CPU	- Support for Socket AM3 processors: AMD Phenom™ II X6 / X4 / X3 / X2 (except 920 / 940) / Athlon II X4 / X3 / X2 / Sempron processors - Six-Core CPU Ready - Supports ASRock UCC - Unlock CPU Core - AMD LIVE!™ Ready - Supports AMD's Cool 'n' Quiet Technology - FSB 2600 MHz (5.2 GT/s) - Supports Untied Overclocking Technology - Supports Hyper-Transport 3.0 (HT 3.0) Technology
Chipsatz	- Northbridge: AMD 785G - Southbridge: AMD SB710
Arbeitsspeicher	- Dual Channel DDR3 memory technology - 2 x DDR3 DIMM slots - Supports DDR3 1800(OC)/1600(OC)/1333/1066/800 non-ECC, un-buffered memory - Max. capacity of system memory: 8GB* *Due to the operating system limitation, the actual memory size may be less than 4GB for the reservation for system usage under Windows® 32-bit OS. For Windows® 64-bit OS with 64-bit CPU, there is no such limitation.
BIOS	- 8Mb AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - CPU, VCCM, NB Voltage Multi-adjustment

Audio, Video und Netzwerk	
Grafik	- Integrated AMD Radeon HD 4200 graphics - DX10.1 class iGPU, Shader Model 4.1 - Max. shared memory 512MB - Supports D-Sub with max. resolution up to 2048x1536 @ 60Hz
Audio	- 5.1 CH HD Audio (Realtek ALC662 Audio Codec)
LAN	- Realtek PCIEx1 LAN 8105EL - Speed: 10/100 Ethernet - Supports Wake-On-LAN
Erweiterungsslots/Konnektivität	
Steckplätze	- 1 x PCI Express 2.0 x16 slot (blue @ x16 mode) - 1 x PCI Express 2.0 x1 slot - 2 x PCI slots
Anschluss	- 4 x SATAII 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1 RAID 10 and JBOD), NCQ, AHCI and "Hot Plug" functions - 1 x ATA133 IDE connector (supports 2 x IDE devices) - 1 x Floppy connector - 1 x Print port header - CPU/Chassis/Power FAN connector - 24 pin ATX power connector - 4 pin 12V power connector - Front panel audio connector - 2 x USB 2.0 headers (support 4 USB 2.0 ports)
ATX-Blende	I/O Panel - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x Serial Port: COM1 - 1 x VGA Port - 4 x Ready-to-Use USB 2.0 Ports - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Line in / Front Speaker / Microphone
Sonstige Features/Verschiedenes	
Einzigartige Features	- ASRock OC Tuner - Intelligent Energy Saver - Instant Boot - ASRock Instant Flash - ASRock OC DNA - ASRock AIWI - ASRock APP Charger - Hybrid Booster: - CPU Frequency Stepless Control - ASRock U-COP - Boot Failure Guard (B.F.G.)
Support-CD	- Drivers, Utilities, AntiVirus Software (Trial Version), AMD OverDrive™ Utility, ASRock Software Suite (CyberLink DVD Suite - OEM and Trial; Creative Sound Blaster X-Fi MB - Trial)
Produktzubehör	- Quick Installation Guide, Support CD, I/O Shield - 2 x SATA Data Cables (optional)
Hardware überwachung	- CPU Temperature Sensing - Chassis Temperature Sensing - CPU/Chassis/Power Fan Tachometer

	- CPU Quiet Fan - Voltage Monitoring: +12V, +5V, +3.3V, Vcore
Formfaktor	- Micro ATX Form Factor: 9.6-in x 7.2-in, 24.4 cm x 18.3 cm
Betriebssystem	- Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP / XP Media Center / XP 64-bit compliant
Zertifizierungen	- FCC, CE, WHQL - ErP/EuP Ready (ErP/EuP ready power supply is required)

Achtung:
Bitte beachten Sie, dass Overclocking, inklusive dem Verändern von BIOS-Einstellungen und der Nutzung von Overclockingprogrammen von Drittherstellern, immer ein gewisses Risiko bürgt. Overclocking kann ihre Systemstabilität beeinflussen oder aber zu Schäden Ihrer Komponenten und Geräte führen. Die Ausführung geschieht auf eigene Gefahr und Kosten. Für Schäden die durch Overclocking verursachet werden sind wir nicht verantwortlich.

Die Spezifikationen können ohne vorherigen Hinweis geändert werden. Die Marken und Produktnamen sind Schutzmarken der jeweiligen Firmen. Alle Konfigurationen die von den original Spezifikationen abweichen werden nicht garantiert.